


[F U R T I V E 1 . 1]

2-way closed box speaker
 Power handling: 70 Weff
 Peak power: 120 W
 Impedance: 6 ohms
 Sensitivity: 88 dB/2.83V/1M
 Frequency response: 80 Hz -30 kHz (-3dB)
 Bass midrange woofer: ATOHM LD130CR04
 Tweeter: ATOHM SD20ND04F
 Weight: 4.0 kg



Base
(Optional)




Mural fastener
(Provided)



[R A F A L E V R 1 - X]

Active subwoofer : Vented enclosure
 Frequency response : 33 - 150 Hz (-3dB)
 Ported tuning frequency : 36 Hz (with port firing on ground)
 Max. SPL. : 111 dB (rms) / 40 - 100 Hz
 @ 1M (demi espace) THD<3.5%
 «Absolute series» woofer : LD230 CRA 04
 Amplifier module : ATOHM S250 (XG-30)
 Amplifier module power : 220 Weff
 Peak power : 260W / U-guard (soft clipping)
 Active excursion control : X-guard technology (+/- 20 mm max.)
 High and low level inputs :
 Frequency response : 38 to 150 Hz
 Phase control : 0-180°
 Filtering slope : 12dB-24dB-LFE
 Supply voltage : 115 V / 230 V
 Decoupling : «high damping» EPDM foam
 Dimensions / Weight : 320x400x423 (mm) 12.6x15.75x16.75 (inch)
 19.5 kg / 41.9 lbs

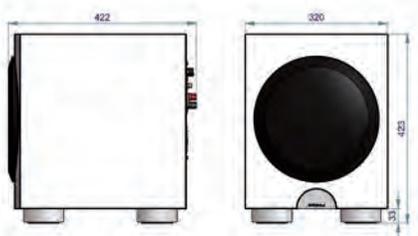

[FURTIVE] and [RAFALE VR1-X]
 available in 2 finishes



Other RAL colours
 on demand

ATOHM®
 Great sound...

| FURTIVE Series |



Products designed and assembled in France.

www.atohm.com

ATOHM®

CRÉATION THIERRY COMTE

12 rue du Breuil • 70150 PIN • FRANCE
 Tél. : (+33) 3 81 47 91 01 • contact@atohm.com

Atohm follows a policy of continuous product improvement and thus reserve the right to amend designs and specifications without prior notice.



...and absolute finesse.



The FURTIVE on-wall concept is the result of our desire to combine elegance and exceptional acoustic performances. With their truly contemporary look and reduced depth, they will blend harmoniously with your interior design.

[F U R T I V E]

The "FURTIVE" on-wall speakers are extremely compact, measuring only 10cm deep, and built using high-end quality components. ATOHM loud speakers are the fruit of several years of research backed up by many hours of listening and tests in our laboratory. They feature an injected aluminum chassis with powerful motorization and "Copper Ring" technology, as well as a specific "LDS" profile suspension... Each component has been designed with the greatest care to guarantee minimum distortion and excellent power handling.

Elegant and easy to integrate, the VR1-X incorporates the superb LD230 CRA 04 woofer. With its imposing "FWI" motor, its stiff alloy cone, its very wide excursion surround and spider, this unit redefines the expectations of what can be achieved from a driver unit of this diameter. The S250 amplifier module propels this exceptional driver with up to +/- 20mm of excursion. Beyond this extreme value, X-GUARD (active excursion control) technology limits distortion as well as maximum excursion and U-GUARD technology provides a "soft" clipping. The bass reflex system features a wide port whose floor is the extension tuned at the lowest frequency. The MDF crafted cabinet, the weight of the complete assembly and the decoupling by EPDM foam render this subwoofer perfectly stable.

Bearing in mind its outstanding performances and the endless number of configurations possible, VR1-X is a perfect match for the "Furtive" on-wall speakers. This association can be adapted to a 2.1 Hi-Fi system and a 5.1 home theater system, to reproduce the quintessence of music and movie soundtracks.

RAFALE VR1-X SUBWOOFER



5 + 1
5 + 1 Configuration



2 + 1
2 + 1 Configuration